

Air Reservoirs

Steel, black primed




Orsan Ticari Araç Fren Sistemleri A.Ş.

Türkgücü OSB Mah. Yılmaz Alpaslan
Cad. No. 69/1 Çorlu/Tekirdağ TURKEY

+90 282 681 84 00
+90 282 681 84 14/15 (Fax)
www.orsantr.com
info@orsantr.com

Technical Features;

Pressure Rating: EN 286-2 with CE-symbol
Maximum Operating Pressure: see tables
Operating Temperature Range: -40 °C to +100 °C
Air Port Threads: M22x1,5
Weight: see tables

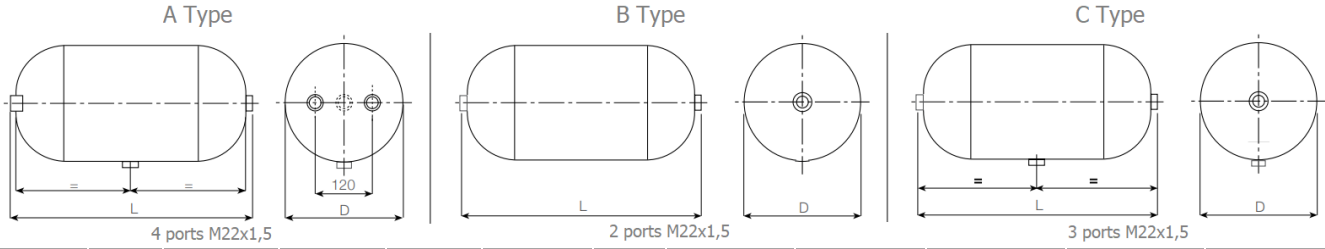

Part No	Vol.	Diameter [D]	Length [L]	Weight	Working Pressure	Type	Port [M22X1,5]	Zf WABCO	Knorr Bremse [DE]	Knorr Bremse [GB]	Peters Ennepetal
6T1540100*	1 L	Ø154 mm	138 mm	1,4 Kg	15,50 bar	B	2 ports				146.531-00A
6T1540301**	3 L	Ø154 mm	187 mm	1,9 Kg	15,50 bar	C	3 ports				126.251-00A
6T1540404**	4 L	Ø154 mm	278 mm	2,6 Kg	15,50 bar	C	3 ports	9502040040			036.351-00A/80A
6T1540503**	5 L	Ø154 mm	345 mm	3,1 Kg	15,50 bar	C	3 ports				
6T1541000**	10 L	Ø154 mm	615 mm	5,2 Kg	15,50 bar	C	3 ports				
6T1541500**	15 L	Ø154 mm	897 mm	7,5 Kg	15,50 bar	C	3 ports				
6T2060506	5 L	Ø206 mm	212 mm	3,0 Kg	15,50 bar	A	4 ports			VB34005/206	086.056-80A
6T2061017	10 L	Ø206 mm	355 mm	4,5 Kg	15,50 bar	A	4 ports	9504100190	VB3301/206	VB3401/206	026.042-80A
6T2061503	15 L	Ø206 mm	527 mm	6,4 Kg	15,50 bar	A	4 ports		VB33015/206		026.039-80A
6T2062021	20 L	Ø206 mm	693 mm	8,1 Kg	15,50 bar	A	4 ports	9504080010	VB3302/206	VB3402/206	026.044-00A/80A
6T2062503	25 L	Ø206 mm	844 mm	9,7 Kg	15,50 bar	A	4 ports				016.368-00A/80A
6T2063001	30 L	Ø206 mm	974 mm	11,3 Kg	15,50 bar	A	4 ports				146.520-00A/80A
6T2461504	15 L	Ø246 mm	380 mm	5,8 Kg	15,50 bar	A	4 ports	9505150030			146.505-00A/80A
6T2462018	20 L	Ø246 mm	508 mm	7,4 Kg	15,50 bar	A	4 ports	9505200000	VB3302/246	VB3402/246	016.229-80A
6T2462511	25 L	Ø246 mm	601 mm	8,6 Kg	15,50 bar	A	4 ports	9505250000			026.046-00A/80A
6T2463023	30 L	Ø246 mm	709 mm	10,0 Kg	15,50 bar	A	4 ports	9505100040	VB3303/246	VB3403/246	026.047-00A/80A
6T2464006	40 L	Ø246 mm	927 mm	12,7 Kg	15,50 bar	A	4 ports	9505400000	VB3304/246	VB3404/246	076.452-00A/80A
6T2762008	20 L	Ø276 mm	414 mm	6,9 Kg	15,50 bar	A	4 ports	9507200080	VB3302/276		
6T2763017	30 L	Ø276 mm	583 mm	9,3 Kg	15,50 bar	A	4 ports	9507300210	VB3303/276	VB3403/276	016.224-00A/80A
6T2764015	40 L	Ø276 mm	758 mm	11,7 Kg	15,50 bar	A	4 ports	9507120010	VB3304/276	VB3404/276	076.453-00A/80A
6T2766008	60 L	Ø276 mm	1108 mm	16,7 Kg	15,50 bar	A	4 ports	9507180010	VB3306/276	VB3406/276	076.454-00A/80A
6T3102000	20 L	Ø310 mm	338 mm	6,7 Kg	12,50 bar	A	4 ports				
6T3104016	40 L	Ø310 mm	618 mm	11,1 Kg	12,50 bar	A	4 ports	9509110010	VB3304/310		076.459-00A/80A
6T3105005	50 L	Ø310 mm	761 mm	13,3 Kg	12,50 bar	A	4 ports				
6T3106023	60 L	Ø310 mm	893 mm	15,5 Kg	12,50 bar	A	4 ports	9509170010	VB3306/310	VB3406/310	076.455-00A
6T3108000	80 L	Ø310 mm	1157 mm	19,8 Kg	12,50 bar	A	4 ports		VB3308/310	VB3408/310	076.560-80A
6T3966014	60 L	Ø396 mm	580 mm	13,9 Kg	10,00 bar	A	4 ports	9500200140	VB3306/396	VB3406/396	076.456-00A/80A
6T3968015	80 L	Ø396 mm	750 mm	17,4 Kg	10,00 bar	A	4 ports	9500250020	VB3308/396	VB3408/396	076.457-00A/80A
6T39610001	100 L	Ø396 mm	915 mm	25,9 Kg	10,00 bar	A	4 ports	9501000030	VB3310/396	VB3410/396	076.458-00A/80A
6T39612000	120 L	Ø396 mm	1071 mm	29,9 Kg	10,00 bar	A	4 ports				076.463-00A/80A

Air Reservoirs

Aluminum, natural



Orsan Ticari Araç Fren Sistemleri A.Ş.

Türkgücü OSB Mah. Yılmaz Alpaslan
Cad. No. 69/1 Çorlu/Tekirdağ TURKEY

+90 282 681 84 00

+90 282 681 84 14/15 (Fax)

www.orsantr.com

info@orsantr.com

Technical Features;


Pressure Rating: EN 286-2 with CE-symbol

Maximum Operating Pressure: see tables

Operating Temperature Range: -40 °C to +65 °C

Air Port Threads: M22x1,5

Weight: see tables

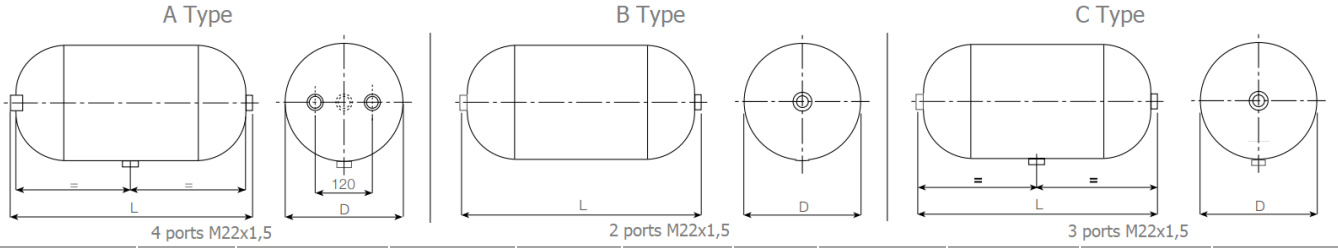

Part No	Vol.	Diameter [D]	Length [L]	Weight	Working Pressure	Type	Port [M22X1,5]	Zf WABCO	Knorr Bremse [DE]	Peters Ennepetal
6TA1540203-B*	2 L	Ø154 mm	171 mm	0,8 Kg	12,50 bar	B	2 ports			
6TA1540401-B**	4 L	Ø154 mm	284 mm	1,4 Kg	12,50 bar	C	3 ports			
6TA1540502-B**	5 L	Ø154 mm	309 mm	1,5 Kg	12,50 bar	C	3 ports			
6TA1540750-B**	7,5 L	Ø154 mm	475 mm	2,1 Kg	12,50 bar	C	3 ports			
6TA2061000-B	10 L	Ø206 mm	370 mm	2,4 Kg	12,50 bar	A	4 ports			
6TA2061501-B	15 L	Ø206 mm	509 mm	3,2 Kg	12,50 bar	A	4 ports			026.050-00A
6TA2062000-B	20 L	Ø206 mm	690 mm	4,2 Kg	12,50 bar	A	4 ports		VB4302/206	
6TA2063001-B	30 L	Ø206 mm	992 mm	5,8 Kg	12,50 bar	A	4 ports			
6TA2462003-B	20 L	Ø246 mm	500 mm	3,8 Kg	12,50 bar	A	4 ports		VB4302/246	026.051-00A
6TA2462504-B	25 L	Ø246 mm	584 mm	4,4 Kg	12,50 bar	A	4 ports			
6TA2463014-B	30 L	Ø246 mm	724 mm	5,3 Kg	12,50 bar	A	4 ports	9505309040	VB4303/246	026.052-00A
6TA2464003-B	40 L	Ø246 mm	922 mm	6,7 Kg	12,50 bar	A	4 ports		VB4304/246	
6TA2763004-B	30 L	Ø276 mm	588 mm	5,8 Kg	12,50 bar	A	4 ports		VB4303/276	076.476-00A
6TA2764009-B	40 L	Ø276 mm	766 mm	7,2 Kg	12,50 bar	A	4 ports	9507409070	VB4304/276	
6TA2766001-B	60 L	Ø276 mm	1111 mm	10,3 Kg	12,50 bar	A	4 ports		VB4306/276	
6TA3103000-B	30 L	Ø310 mm	486 mm	5,6 Kg	11,00 bar	A	4 ports			
6TA3104000-B	40 L	Ø310 mm	629 mm	7,0 Kg	11,00 bar	A	4 ports		VB4304/310	
6TA3106007-B	60 L	Ø310 mm	902 mm	9,6 Kg	11,00 bar	A	4 ports	9509109010	VB4306/310	076.483-00A
6TA3108001-B	80 L	Ø310 mm	1175 mm	12,3 Kg	11,00 bar	A	4 ports			
6TA3966000-B	60 L	Ø396 mm	580 mm	8,5 Kg	11,00 bar	A	4 ports		VB4306/396	
6TA3968012-B	80 L	Ø396 mm	745 mm	10,5 Kg	11,00 bar	A	4 ports	9500099010	VB4308/396	076.485-00A
6TA3961004-B	100 L	Ø396 mm	919 mm	12,7 Kg	11,00 bar	A	4 ports		VB4310/396	076.486-00A
6TA39612000-B	120 L	Ø396 mm	1074 mm	14,7 Kg	11,00 bar	A	4 ports			

Air Reservoirs

Steel with Bracket, black primed



Orsan Ticari Araç Fren Sistemleri A.Ş.

Türkgücü OSB Mah. Yılmaz Alpaslan
Cad. No. 69/1 Çorlu/Tekirdağ TURKEY

+90 282 681 84 00
+90 282 681 84 14/15 (Fax)


www.orsantr.com
info@orsantr.com

Technical Features;

Pressure Rating:	EN 286-2 with CE-symbol
Maximum Operating Pressure:	see tables
Operating Temperature Range:	-40 °C to +100 °C
Air Port Threads:	M22x1,5
Weight:	see tables




A Type

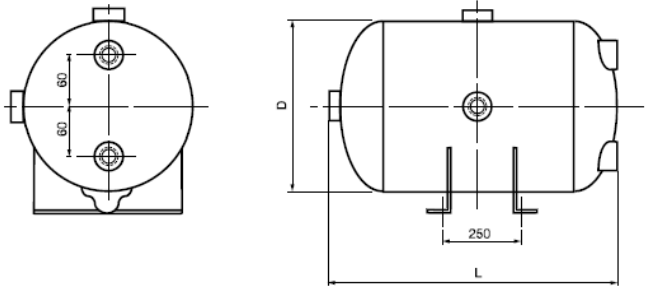

5 Ports M22x1,5

B Type

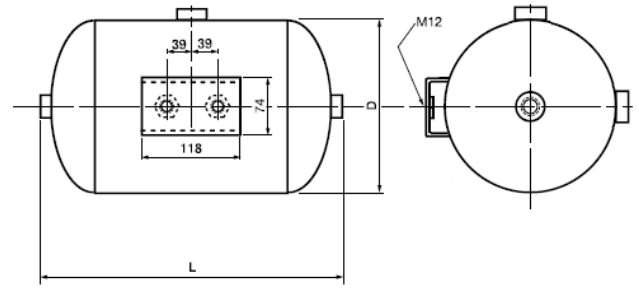

4 Ports M22x1,5

Part No	Vol.	Diameter [D]	Length [L]	Weight	Working Pressure	Type	Port [M22x1,5]	Zf Wabco	Knorr Bremse [DE]	Peters Ennepetal
9T1540511	5 L	Ø154 mm	351 mm	3,7 Kg	15,50 bar	B	4 ports	9502050000		026.041.00A
9T2461503	15 L	Ø246 mm	396 mm	7,5 Kg	15,50 bar	A	5 ports	9505150000		
9T2764001	40 L	Ø276 mm	767 mm	13,5 Kg	15,50 bar	A	5 ports	9507400000	VB6304/276	076.565-00A
9T3106004	60 L	Ø310 mm	898 mm	17,5 Kg	12,50 bar	A	5 ports	9509600010	VB6306/310	076.956-00/80A
9T3966002	60 L	Ø396 mm	575 mm	20,0 Kg	12,50 bar	A	5 ports	9500600000		076.567-00A/80A
9T3968004	80 L	Ø396 mm	751 mm	24,0 Kg	12,50 bar	A	5 ports	9500800000		076.519-00A/80A

Air Reservoirs

Aluminum with Bracket, natural



Orsan Ticari Araç Fren Sistemleri A.Ş.

Türkgücü OSB Mah. Yılmaz Alpaslan
Cad. No. 69/1 Çorlu/Tekirdağ TURKEY


+90 282 681 84 00
+90 282 681 84 14/15 (Fax)
www.orsantr.com
info@orsantr.com

Technical Features;

Pressure Rating: EN 286-2 with CE-symbol
Maximum Operating Pressure: see tables
Operating Temperature Range: -40 °C to +65 °C
Air Port Threads: M22x1,5
Weight: see tables




A Type

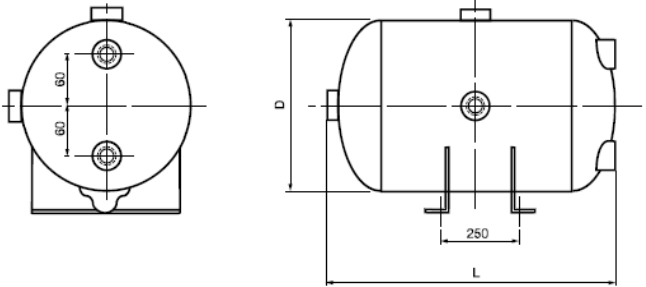

5 Ports M22x1,5

B Type

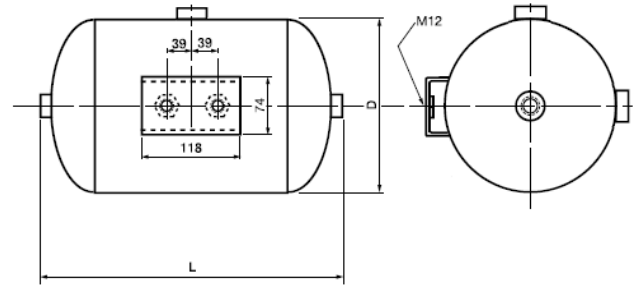

4 Ports M22x1,5

Part No	Volume	Diameter [D]	Length [L]	Weight	Working Pressure	Type	Port	Zf WABCO	Knorr Bremse [DE]
9TA1540502-B	5 L	Ø 154 mm	345 mm	2,0 Kg	12,50 bar	B	4 ports M22x1,5		
9TA2462000-B	20 L	Ø 246 mm	504 mm	4,3 Kg	12,50 bar	A	5 ports M22x1,5	9505209000	VB7302/246
9TA2463000-B	30 L	Ø 246 mm	724 mm	5,8 Kg	12,50 bar	A	5 ports M22x1,5	9505309000	
9TA2764006-B	40 L	Ø 276 mm	768 mm	8,0 Kg	12,50 bar	A	5 ports M22x1,5	9507409000	
9TA3106004-B	60 L	Ø 310 mm	895 mm	10,5 Kg	11,00 bar	A	5 ports M22x1,5	9509609000	VB7306/310
9TA3966010-B	60 L	Ø 396 mm	609 mm	9,5 Kg	11,00 bar	A	5 ports M22x1,5	9500609040	VB7306/396
9TA3968012-B	80 L	Ø 396 mm	749 mm	11,0 Kg	11,00 bar	A	5 ports M22x1,5	9500809000	VB7308/396
9TA3961004-B	100 L	Ø 396 mm	919 mm	13,0 Kg	11,00 bar	A	5 ports M22x1,5	9500009000	VB7310/396